


# Instructions; Raptor 700 '06-'08 Rear Lowering Strut

Part Number das-r

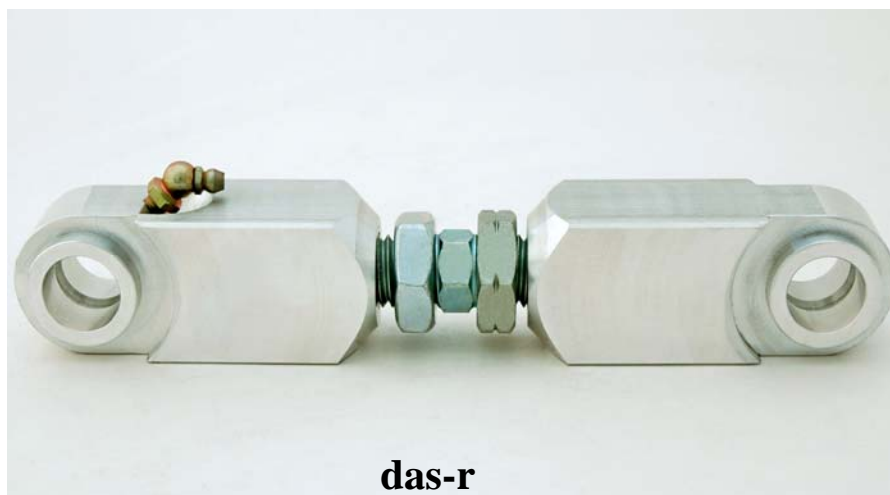


das-r

**Note: Make sure you have received a complete kit. The picture (top left) shows all the parts and how they go together.**

**1) From middle chassis, raise the atv so that rear swing arm can hang freely.**

Facing the front, this is the right side.

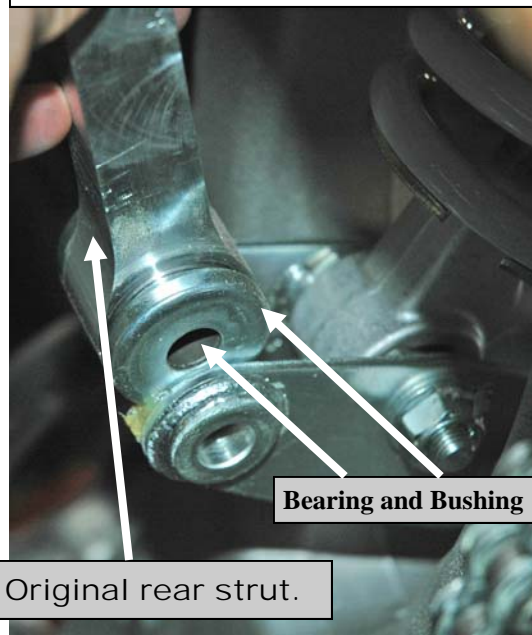

Original rear strut.

Swing arm from underneath.



Remove lower shock mount bolt.

**2) Locate original rear strut, and undo bolt near bottom zerk fitting. The bushings and bearing should remain on the strut. Do the same with the upper bolt.**

**3) Install stock bearing and bushings into each end of new strut, making sure each side is secure.**

**4) Install strut into upper mounting first, making sure bushings slide easily in place. Replace stock bolt, but do not tighten. Repeat with bottom fitting.**

**5) Tighten all bolts, and check for binding. Each end should fit snug.**

**This is how your lowering kit should look when you're done! ► Bounce rear up & down, check for binding!**

**Note: The front lowering kit is designed for flat track or ice racing. This kit is not recommended for jumping. For further inquiries call our tech support hotline M-F, 8 to 5 PST. 949-770-5533**

