
Yamaha YFZ450R & YFZ450X Front Lowering Kit



Note: Make sure you have received a complete kit. The picture (top left) shows all the parts and how they go together.

1) Jack up the front end of the quad so the front wheels are off the ground.


Facing the front, this is the left side.



The upper shock mount bolt as been removed.

2) Remove the upper bolt that holds the shock in place.

Note: Each lowering kit has 2 aluminum spacers which go between the plate and the shock. The order is plate, spacer, shock, spacer, plate. See picture►




Aluminum spacer goes here.

3) Mount the 2 plates on the upper shock mount first. Push the bolt through and start the nut but don't tighten yet. Move the shock into position between the plates. Put the bolt through the plate and place the first spacer between the plate and the shock. Push the bolt through the shock and put the second spacer into place. Push the bolt through the second plate and screw the nut on by hand. Now tighten the nut on the frame first, torque to 40 ft. lbs., plus or minus 3 lbs. Tighten the second nut and bolt that holds the shock.

This is how your lowering kit should look when you're done! ► Bounce front up & down, check for binding!

Note: The front lowering kit is designed for flat track or ice racing. This kit is not recommended for jumping. For further inquiries call our tech support hotline M-F, 8 to 5 PST. 949-770-5533

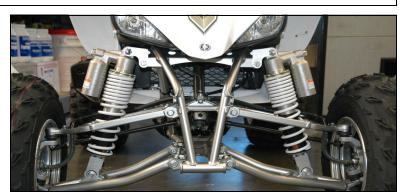

Durablue 20521 Crescent Bay Dr. Lake Forest Ca. 92630 949-770-5533 (www.durablue.com)