
Yamaha Raptor 700 Front Lowering Kit



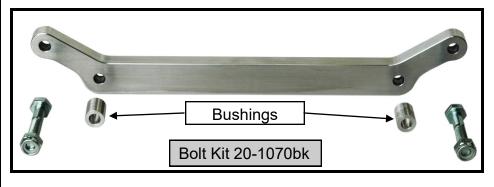

2) Remove the upper

shock bolts on both sides and swing the shock away

from mounting bracket.

the original shock

be pointing up. The

proper orientation.

3) Install the lowering kit bracket and bushings in

mounting holes using the stock nut and bolt. The ears of the bracket should

picture on the right shows

Note: Make sure you have received a complete kit. The picture (top left) shows all the parts and how they go together.

1) Raise the front end of the quad so the front wheels are off the ground.

Facing the front this is the right side



Original shock mount position.

4) Be sure to position the lowering bracket against the front of the shock mount bracket and bushings against the back. Do not tighten the bolts at this time. 5) Re-install the shock in the desired mounting holes using the supplied hardware. 6) Lower the bike, tighten all bolts and check the suspension for binding.

Note: Due to manufacturing variances, it may be necessary to bore the bracket mounting holes for proper fit.

This is how your lowering kit should look when you're done! ► Bounce front up & down, check for binding!

Remove upper shock mount bolt.

For further inquiries call our tech support hotline. We are happy to answer any questions you may have.

M-F, 8 to 5 PST. 949-770-5533



Durablue 20521 Crescent Bay Dr. Lake Forest Ca. 92630 949-770-5533 (www.durablue.com)

4-27-09